

Thermal Solution LED Gridlight





The A⁺ Group www.the-agroup.com.hk



Surface Mounted Grid Light

- Up to 80% energy saving, no UV&IR. High luminous efficacy, high CRI LED chip.
- High quality Driver, high cost-effective fixture can be connected to emergency devices.
- Easy installation and maintenance-free, a real durable lighting solution.
- Widely used in shopping malls, offices, cosmetics stores, hotels, etc.





Model NO: CES801B-C

LED Power: 1*25W LED Current: DC 700mA CCT: 2700K/3000K/4000K Beam angle: 15°24°38°50° Color: Material:

Cold Rolled Steel+Aluminum Cut-out: 140*140mm Diver: 1*CEC0700-12UH








15°

15°

(3000K)Warm White







Model NO: CES802B-C

LED Power: 2*25W LED Current: DC 700mA CCT: 2700K/3000K/4000K Beam angle: 15°24°38°50° Color:


Material: Cold Rolled Steel+Aluminum Cut-out: 268*140mm Diver: 2*CEC0700-12UH







(3000K)Warm White







Model NO: CES803B-C

LED Power: 3*25W LED Current: DC 700mA CCT: 2700K/3000K/4000K Beam angle: 15°24°38°50° Color: Material:


Cold Rolled Steel+Aluminum Cut-out: 398*140mm Diver: 2*CEC0700-12UH







(3000K)Warm White







Model NO: CES801A-C

LED Power: 1*25W LED Current: DC 700mA*1 CCT: 2700K/3000K/4000K Beam angle: 15°24°38°50° Color: Material:


Cold Rolled Steel+Aluminum Cut-out: 160*160mm Diver: 1*CEC0700-12UH







(3000K)Warm White





THE A⁺ GROUP



Model NO: CES802A-C
LED Power: 2*25W
LED Current: DC 700mA*2
CCT: 2700K/3000K/4000K
Beam angle: 15°24°38°50°
Color: Material:
Cold Rolled Steel+Aluminum
Cut-out: 312*160mm
Diver: 2*CEC0700-12UH









(3000K)Warm White

	Gamma Angle 180	15°			
	3	H[m]	D[cm]	Em	Emax
	-60	1.00	30.9 77.28	7035 1126	10752 1720
3000K	12000	3.00	92.74	781.7	1195
48001m	-30 15000 30	4.00 5.00	123.65 154.56	439.7 281.4	672.0 430.1
	0				






Model NO: CES803A-C LED Power: 3*25W LED Current: DC 700mA*3

LED Current: DC 700mA*3
CCT: 2700K/3000K/4000K
Beam angle: 15°24°38°50°
Color:

Material:
Cold Rolled Steel+Aluminum
Cut-out: 450*160mm
Diver: 3*CEC0700-12UH












(3000K)Warm White








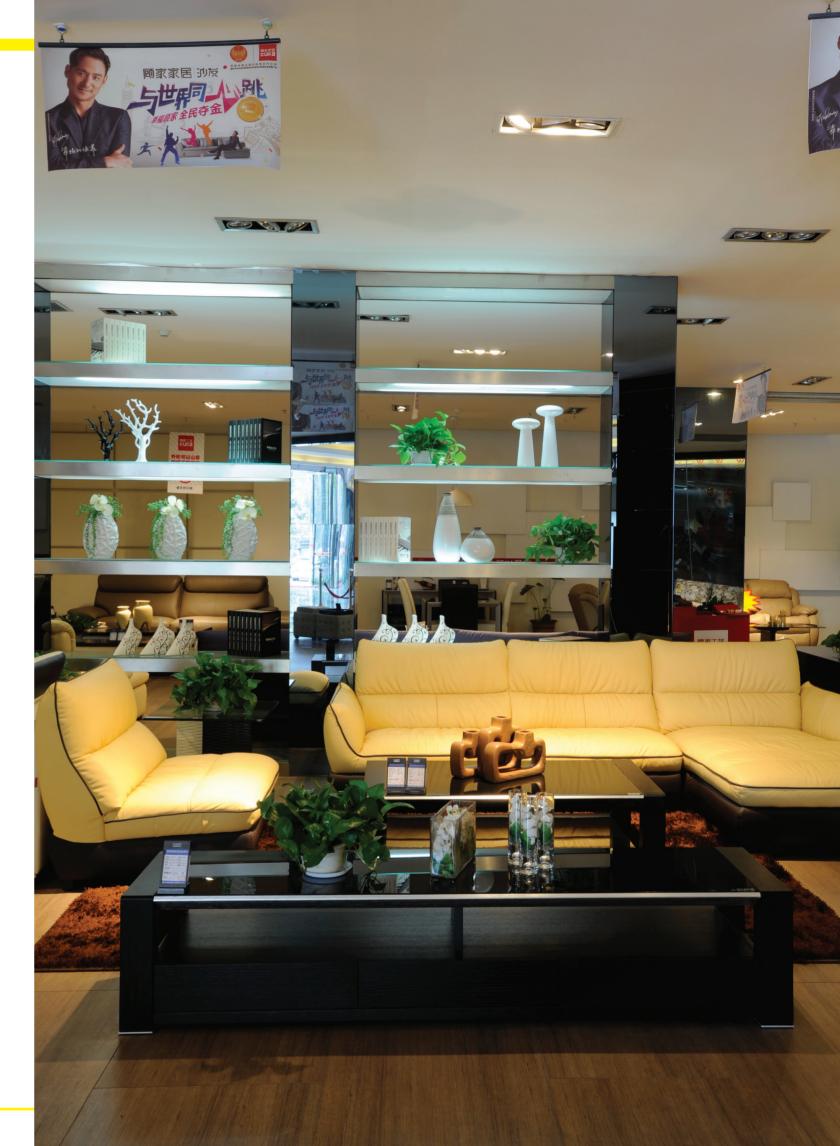





- Up to 80% energy saving, no UV&IR. High luminous efficacy, high CRI LED chip.
- High quality Driver, high cost-effective fixture can be connected to emergency devices.
- Easy installation and maintenance-free, a real durable lighting solution.
- Widely used in shopping malls, offices, cosmetics stores, hotels, etc.

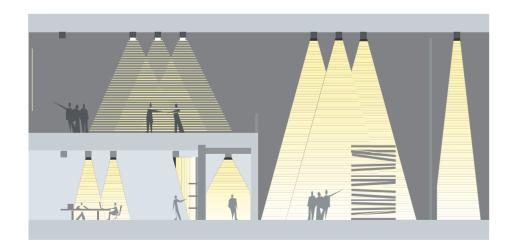




Model NO: CES801F-C LED Power: 1*25W LED Current: DC 700mA*1 CCT: 3000K/4000K Beam angle: 12°20°38°50° Color: Material: Aluminum Cut-out: 118*118mm



(3000K)Warm White








Model NO: CES802F-C

LED Power: 2*25W LED Current: DC 700mA*2 CCT: 3000K/4000K Beam angle: 12°20°38°50° Color: Material: Aluminum

Cut-out: 240*120mm Diver: 2*CEC0700-12UH












Model NO: CES803F-C LED Power: 3*25W LED Current: DC 700mA*3 CCT: 3000K/4000K Beam angle: 12°20°38°50° Color:

Material: Aluminum Cut-out: 348*120mm Diver: 3*CEC0700-12UH



(3000K)Warm White







Web Site

www.the-agroup.com.hk

E-mail

info@the-agroup.com

Address

Unit 7, 18/F., Metro Centre II, No. 21 Lam Hing Street, Kowloon Bay, Kowloon, Hong Kong

Editor

Au Pui Man

We reserves all rights to make any changes to technical information's or data without notification, should there be any dispute the decision of The $A^{\scriptscriptstyle +}$ Group shall be final.