

®




Thermal Solution LED Striplight




The A⁺ Group
www.the-agroup.com.hk




- Two type of chips: 3528, 5050.
- Low wattage, high light efficiency, more energy-saving, color bright, more option.
- Easy installation, with 3M on the back.
- Applied in hotels, clubs, residential places.

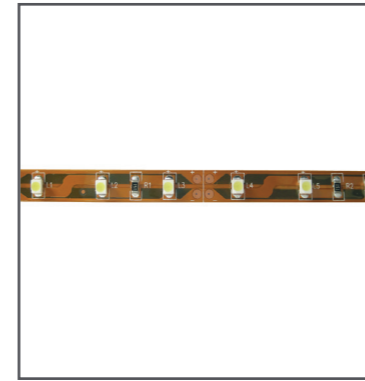


Model NO: CEGB3528-50
 LED Power: 4.0-4.6W/m
 Input Voltage: DC12V
 Current: 330-385mA
 CCT: 2700K/4000K/6400K
 Beam angle: 120°
 Luminous flux: 250-300lm
 QTY/M: 60PCS/M
 Packing: 5M/Roll
 IP: IP20

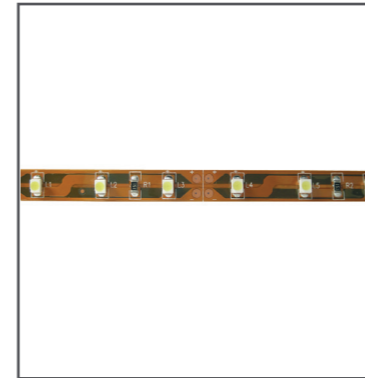


Model NO: CEGB5050-50
 LED Power: 5.4-6W/m
 Input Voltage: DC12V
 Current: 550-600mA
 CCT: 2700K/4000K/6400K
 Beam angle: 120°
 Luminous flux: 300-360lm
 QTY/M: 30PCS/M
 Packing: 5M/Roll
 IP: IP20

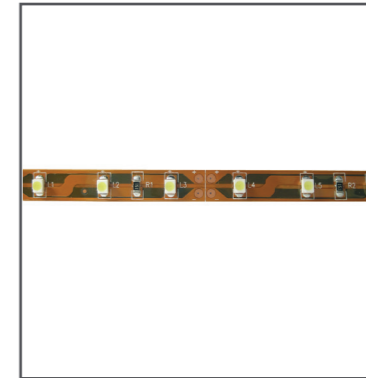


Model NO: CEGB5050-50
 LED Power: 10.8-12W/m
 Input Voltage: DC12V
 Current: 1100-1200mA
 CCT:
 2400K/2700K/4000K/6400K
 Beam angle: 120°
 Luminous flux: 600-720lm
 QTY/M: 60PCS/M
 Packing: 5M/Roll
 IP: IP20

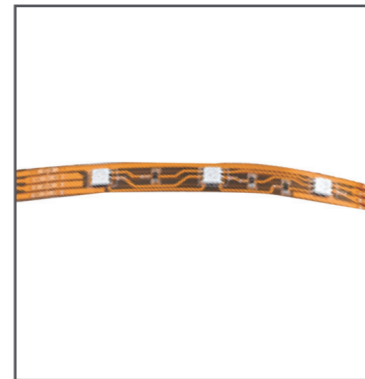

Model NO: CEGB5050R-50
 LED Power: 6.12-6.84W/m
 Input Voltage: DC12V
 Current: 510-570mA
 Light Color: ■ ■ ■
 Beam angle: 120°
 Luminous flux: 135-160lm
 QTY/M: 60PCS/M
 Packing: 5M/Roll
 IP: IP20

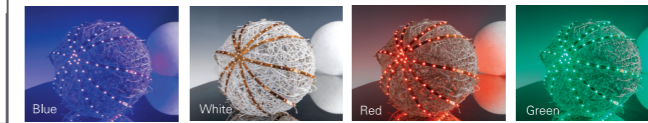


Driver and Accessories not included, to be ordered separately.




(3528-5050)
 Single-end connector
 (3528-5050)



RGB Remote controller
 Color changeable



(RGB)
 Single-end connector (RGB)




(3528-5050-RGB)
 Twin-end connector
 (3528-5050-5050)



CDN LED Waterproof flexible strip light series

- Applying high quality organic electronic silica gel filling.
- IP65 or IP68.
- Color changeable, work with remote controller.

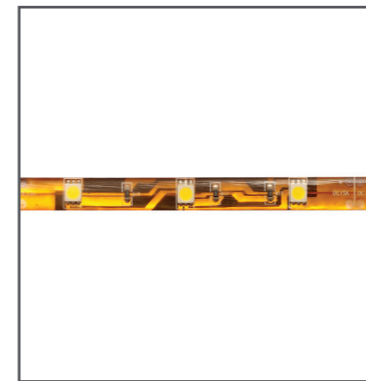


Model NO: CEGB3528F-50
 LED Power: 4.0-4.6W/m
 Input Voltage: DC12V
 Current: 330-385mA
 CCT:
 2400K/2700K/4000K/6400K
 Beam angle: 120°
 Luminous flux: 230-280lm
 QTY/M: 60PCS/M
 Packing: 5M/Roll
 IP: IP65/IP67



Model NO: CEGB5050F-50
 LED Power: 6.50-7.20W/m
 Input Voltage: DC12V
 Current: 550-600mA
 CCT:
 2400K/2700K/4000K/6400K
 Beam angle: 120°
 Luminous flux: 270-330lm
 QTY/M: 30PCS/M
 Packing: 5M/Roll
 IP: IP65/IP67



Model NO: CEGB5050F-50
 LED Power: 13.0-14.5W/m
 Input Voltage: DC12V
 Current: 1100-1200mA
 CCT:
 2400K/2700K/4000K/6400K
 Beam angle: 120°
 Luminous flux: 540-660lm
 QTY/M: 60PCS/M
 Packing: 5M/Roll
 IP: IP65/IP67

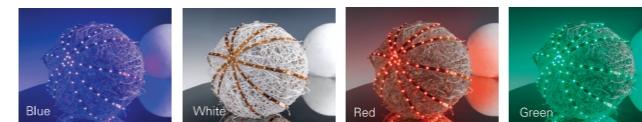



Web Site

www.the-agroup.com.hk

E-mail

info@the-agroup.com

Address

Unit 7, 18/F., Metro Centre II, No. 21 Lam Hing Street,
Kowloon Bay, Kowloon, Hong Kong

Editor

Au Pui Man

We reserves all rights to make any changes to technical information's or data without notification, should there be any dispute the decision of The A⁺ Group shall be final.