



# Thermal Solution LED Tracklight



The A<sup>+</sup> Group  
[www.the-agroup.com.hk](http://www.the-agroup.com.hk)

# Hero Track Light Series

Tool-free to replace accessories after installation.  
Integrated dimmer  
Min beam 12°



3800lm

### Features & Application

- Integrated dimmer optional.
- 3800lm output, 127247387500 optional.
- Rotatable 0° to 355° horizontally, adjustable 0° to 90° vertically.
- Passive cooling system ensures the long life of luminaire.
- A series of accessories available for different lighting effect.
- 1-circuit or 3-circuit adaptor optional for different applications.
- High quality light available in 3000K/4000K, CRI 80 or 90, 2 SDCM.



## F02

### CONNECTION TUBE

For filter glasses, lens or honeycomb louver

## F05

### ANTI GLARE FLAPS

It is possible to attach additional color filter glasses



## F01

### FOR ACCESSORY CONNECTION RING

For filter glasses, lens or honeycomb louver

## F03


### WITH CROSS LOUVER CONNECTION TUBE

It is possible to attach additional filter, lens or honeycomb louver

## F04

### VISOR

For glare protection and filter glasses, lens or honeycomb louver




G01 Honeycomb louver



G02 Color effect filter-RED



G03 Color effect filter-GREEN



G04 Color effect filter-YELLOW





G05 Spread Glass





**Model NO: CEJ6288C**  
LED Power: 1\*35W  
LED Current: DC 800mA  
CCT: 3000K/4000K  
Beam angle: 12°24°38°50°  
Color:    
Material: Aluminum  
Adaptor: 1-circuit or 3-circuit  
Diver: Built-in







- Passive cooling system ensures the long life of luminaires.
- 1-circuit or 3-circuit optional for your different applications.
- Adjustable 0-355° horizontally, tilt able 0-90° vertically.
- Good quality light available in 3000K, 4000K, Ra 80 or 90.
- Matt white, Matt black optional.
- Widely used in showrooms, stores, exhibitions, art galleries.



**Model NO: CEJ9103C**  
 LED Power: 1\*25W  
 LED Current: DC 700mA  
 CCT: 2700K/3000K/4000K  
 Beam angle: 15°/24°/38°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in





## Various ways of installation



### Gridding CEL9101G1

Gear Box  
CEL9101D



Surface mounted  
CEL9101W



Wall mounted  
CEL9101W



Suspended  
CEL910P



Recessed  
CEL9101R





Compatible with MR16 lamp  
CEL9101M1 with GU10 holder  
CEL9101M5 with GU5.3 holder




## Light Spot Adjustable CEL9101F




### Adsorbed Optics Lens





F01. 10° beam angle



F02. Optics Lens in rectangle shape



F03. Optics Lens in hexagon shape




F04. Optics lens in line shape

Focus Adjustable CEL9101A



Changing beam angle by adjusting front lens


Beam angle to be adjusted consecutively

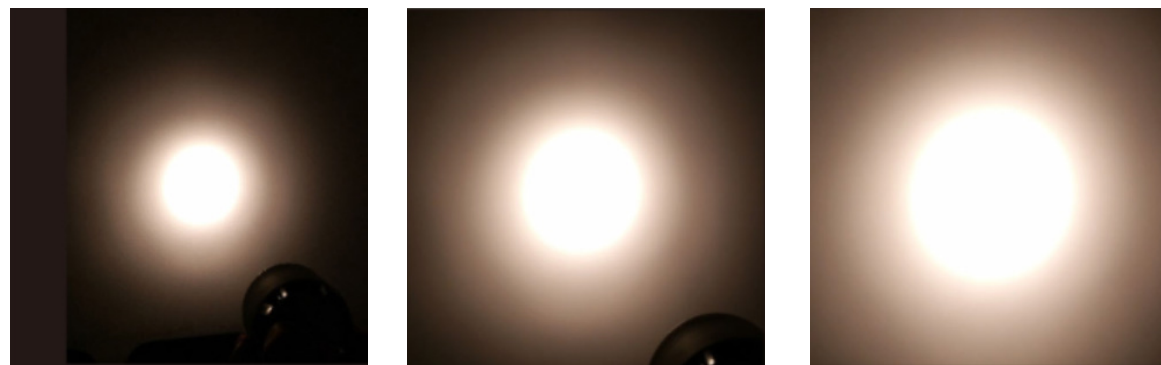










- Passive cooling system ensures the long life of luminaires.
- 1-circuit or 3-circuit optional for your different applications.
- Optical lens combined with reflector to offer higher performance.
- Enough light to replace 70W HID track light.
- Good quality light available in 3000K, 4000K, Ra 80 or 90.
- Matt white, Matt black, and Silver grey optional.
- Adjustable 355°, 90°
- Widely used in showrooms, stores, exhibitions, art galleries.

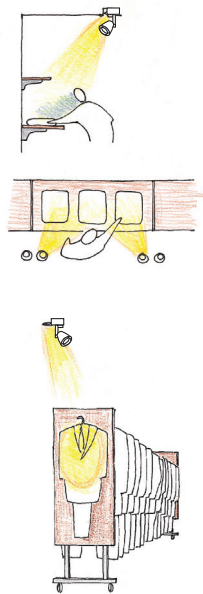



**Model NO: CEL6262**  
 LED Power: 1\*42W  
 LED Current: DC 1050mA  
 CCT: 3000K/4000K  
 Beam angle: 15°24°38°50°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

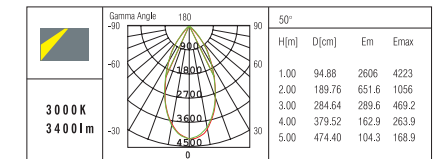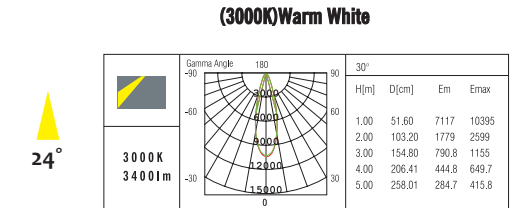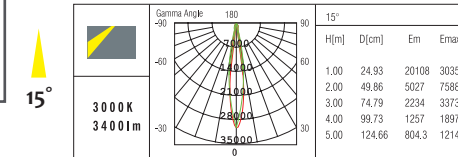




**Model NO: CEL6264**  
 LED Power: 1\*30W  
 LED Current: DC 700mA  
 CCT: 3000K/4000K  
 Beam angle: 15°24°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

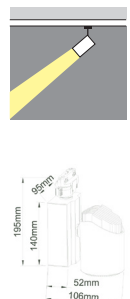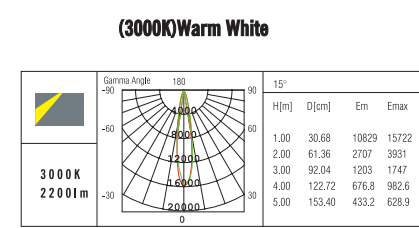

**Model NO: CEL6265**  
 LED Power: 1\*30W  
 LED Current: DC 700mA  
 CCT: 3000K/4000K  
 Beam angle: 15°24°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

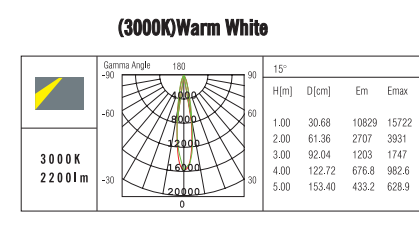

**Model NO: CEL6266C**  
 LED Power: 1\*35W  
 LED Current: DC 800mA  
 CCT: 3000K/4000K  
 Beam angle: 15°24°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit  
 Diver: Built-in

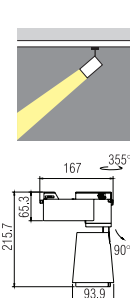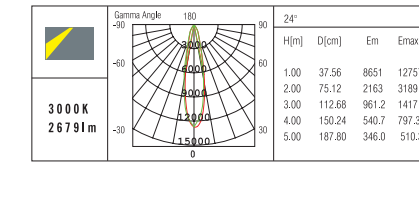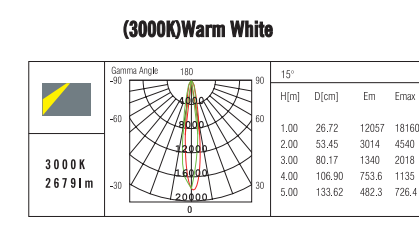





# THE A+ GROUP



**Model NO: CEL6269C**  
 LED Power: 1\*35W  
 LED Current: DC 800mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/30°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

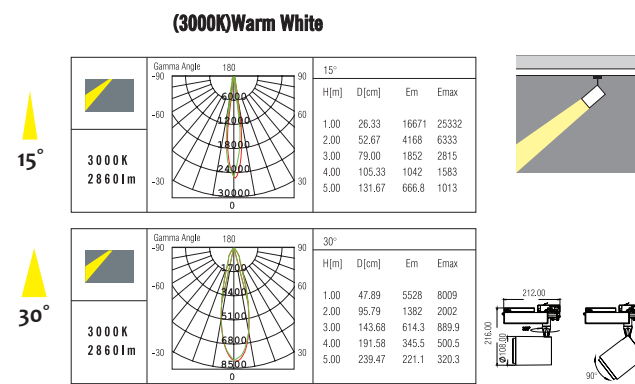

**Model NO: CEL6271C**  
 LED Power: 1\*42W  
 LED Current: DC 1050mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

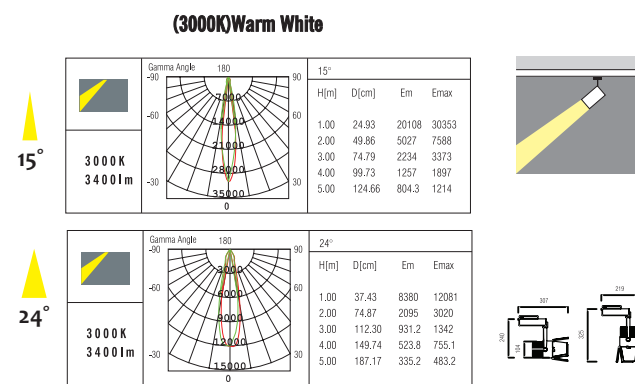






# THE A+ GROUP





- High light efficacy CREE COB LED, Ra>80.
- No UV&IR, low thermal radiation. perfect replacement of 70W HID.
- Good quality light: available in warm white, natural white.
- Optional beam angle with 15° and 24° to meet different requirements.
- Adjustable 355° horizontally and 90° vertically to meet a full range of lighting projection.

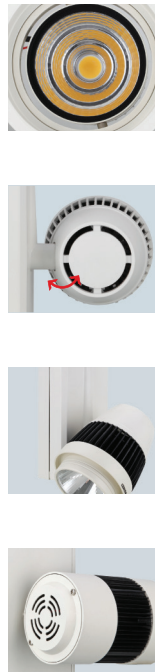



**Model NO: CEL9305C**  
 LED Power: 1\*35W  
 LED Current: DC 1050mA  
 CCT: 2700K/3000K/4000K  
 Beam angle: 15°/24°/38°/60°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit  
 Diver: Built-in

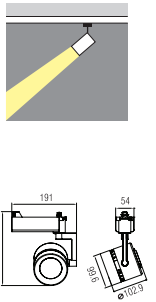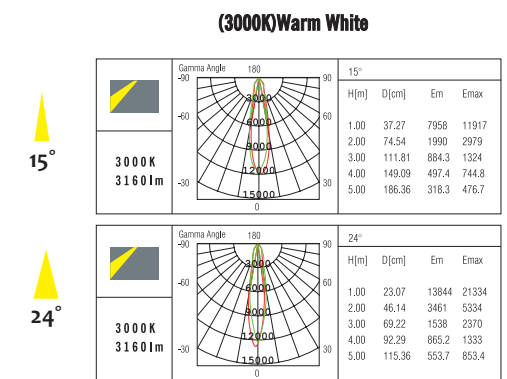

**Model NO: CEL6261C**  
 LED Power: 1\*35W  
 LED Current: DC 1050mA  
 CCT: 2700K/3000K/4000K  
 Beam angle: 15°/24°/38°/50°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

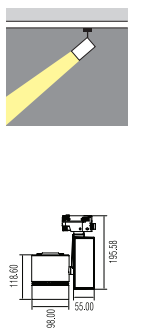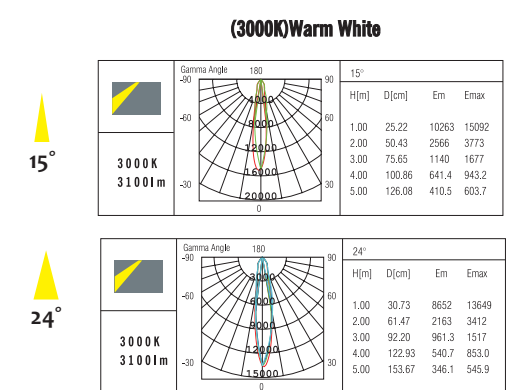

**Model NO: CEL6210C**  
 LED Power: 1\*35W  
 LED Current: DC 1050mA  
 CCT: 2700K/3000K/4000K  
 Beam angle: 20°/30°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

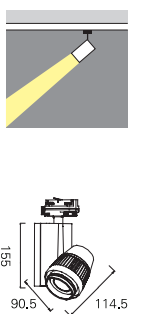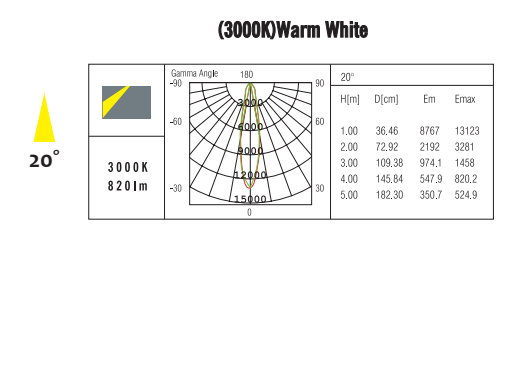





High light efficacy LED chip and high light transmittance PMMA lens.  
Active heat dissipation design ensures long life span of LED chip.  
Multiple beam angles and light colors to meet different requirements.  
Widely used in jewelry stores, museums, commercial shops, hotels, etc.



**Model NO: CEL6207D**  
LED Power: 16\*2.5W  
LED Current: DC 750mA  
CCT: 2700K/3000K/4000K  
Beam angle: 10°/20°  
Color:    
Material: Aluminum  
Adaptor: 1-circuit or 3-circuit  
Diver: Built-in

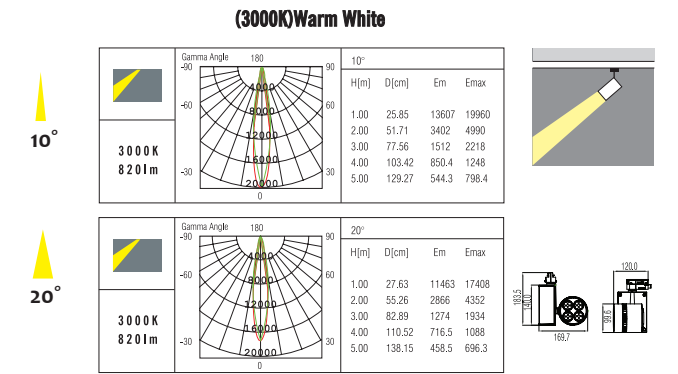


**Model NO: CEL9305B**  
LED Power: 16\*2.5W  
LED Current: DC 700mA  
CCT: 2700K/3000K/4000K  
Beam angle: 10°/20°  
Color:    
Material: Aluminum  
Adaptor: 1-circuit  
Diver: Built-in

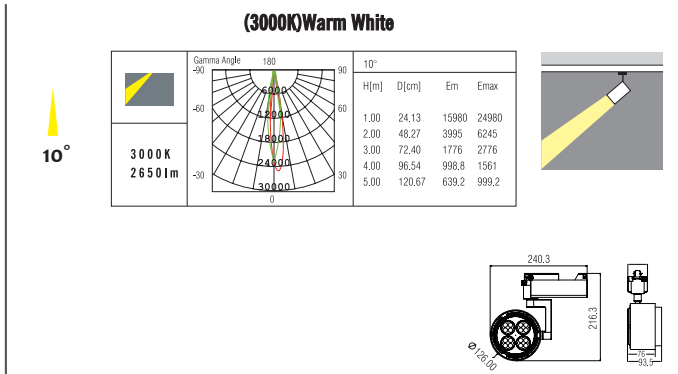







- High light efficacy LED COB chip.
- Good heat-sink design ensures luminaires long life-span.
- Different beam angles, light colors optional.
- Widely used in jewelry stores, museums, commercial stores, hotels, etc.

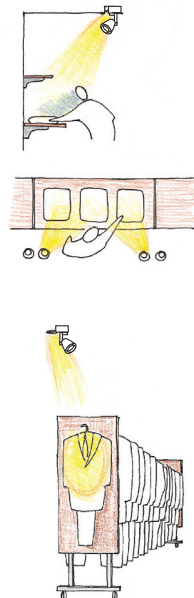


**Model NO: CEL9120C**  
 LED Power: 1\*12W  
 LED Current: DC 300mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit  
 Diver: Built-in

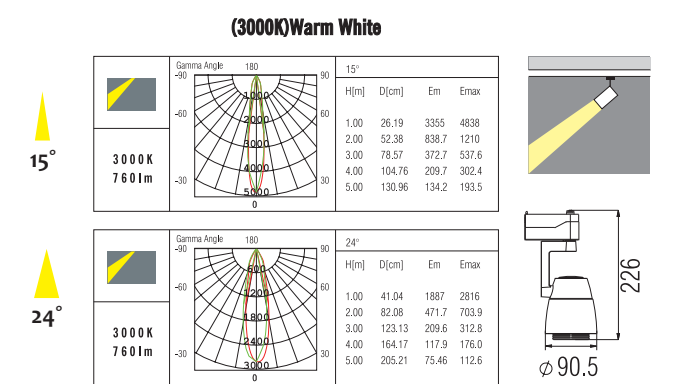


**Model NO: CEL9121C**  
 LED Power: 1\*9W  
 LED Current: DC 200mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit  
 Diver: Built-in

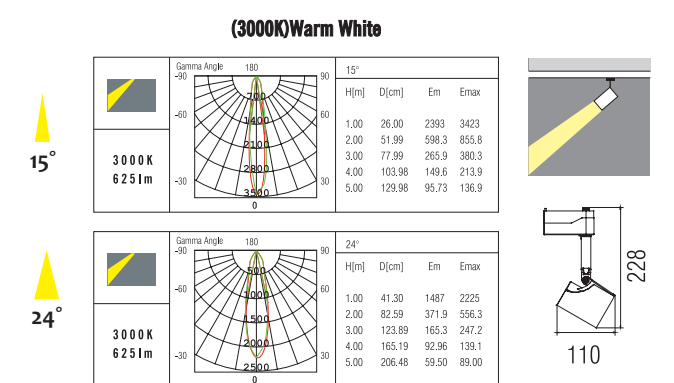

**Model NO: CEX9120C**  
 LED Power: 1\*12W  
 LED Current: DC 300mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°  
 Color:    
 Material: Aluminum  
 Installation: Surface-mounted  
 Diver: Built-in

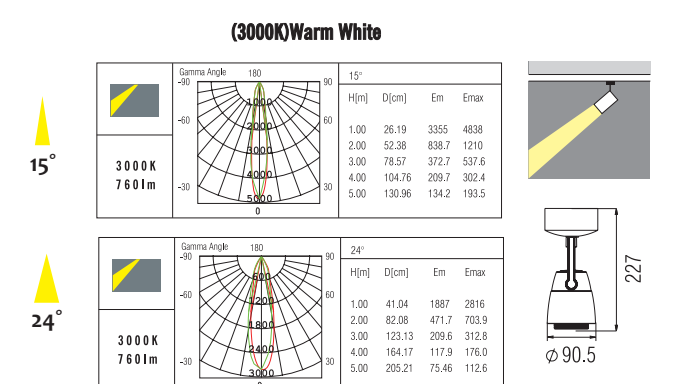

**Model NO: CEX9106C**  
 LED Power: 1\*9W  
 LED Current: DC 300mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°  
 Color:    
 Material: Aluminum  
 Installation: Surface-mounted  
 Diver: Built-in

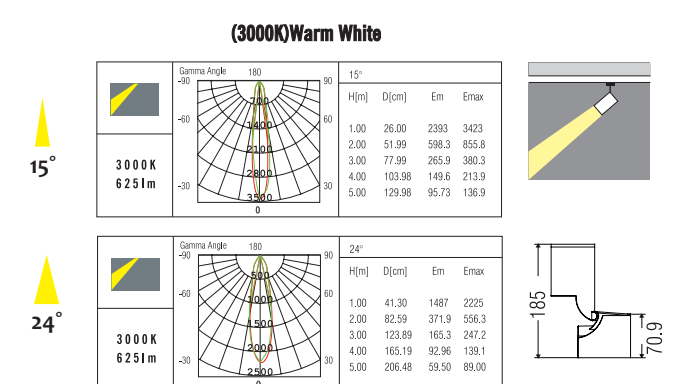






# THE A+ GROUP




**Model NO: CEL9264**  
 LED Power: 1\*18W  
 LED Current: DC 400mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°/38°  
 Color:    
 Material: Aluminum  
 Installation: Surface-mounted  
 Diver: Built-in

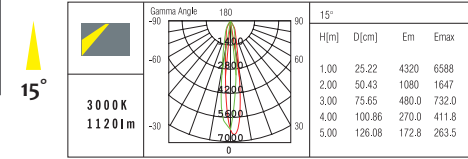



(3000K)Warm White

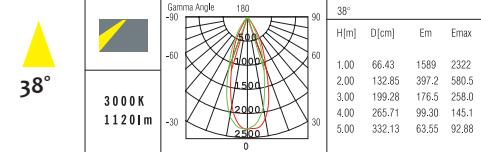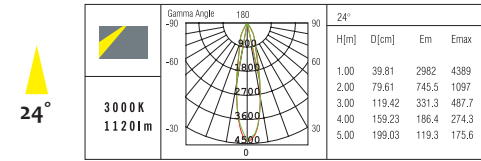

**Model NO: CEL9265**  
 LED Power: 1\*18W  
 LED Current: DC 400mA  
 CCT: 3000K/4000K  
 Beam angle: 15°/24°/38°  
 Color:    
 Material: Aluminum  
 Adaptor: 1-circuit or 3-circuit  
 Diver: Built-in

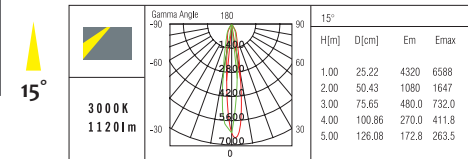

(3000K)Warm White

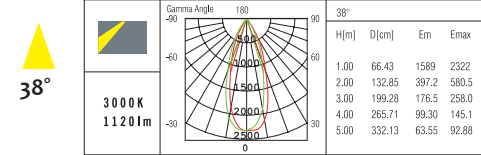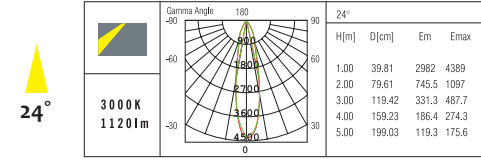





**Web Site**

[www.the-agroup.com.hk](http://www.the-agroup.com.hk)

**E-mail**

[info@the-agroup.com](mailto:info@the-agroup.com)

**Address**

Unit 7, 18/F., Metro Centre II, No. 21 Lam Hing Street,  
Kowloon Bay, Kowloon, Hong Kong

**Editor**

Au Pui Man

We reserves all rights to make any changes to technical information's or data without notification, should there be any dispute the decision of The A<sup>+</sup> Group shall be final.